

# KLEKO360

## THE NEXT GENERATION OF CYLINDRICAL BODIED FASTENERS

**KLEKO360**

Trusted by the aerospace  
industry worldwide



### OVERVIEW

Kleko360 is built on the technology of Kwikbolt's advanced tight tolerance fasteners, popular with (robotic) aircraft build lines.

The Kleko360 provides a lower cost, off-the-shelf fastener range that is an improved replacement for the existing traditional cylindrical bodied fasteners. The mechanism of this product range is based in the head of the product. The legs slide over a centre mandrel to deliver clamping at high loads and with a very large grip range in a set of standard off-the-shelf products.

The product is available in a range of hole diameters and grip ranges, with the added benefit of 360 degree circular clamping and higher loads (estimated to be 70% of hole requirements). Kwikbolt's Kleko360 has been developed with a wide range of customers worldwide.

### SOLUTION

- **Patented single-sided temporary fastener**
- **Provides precise hole alignment** with a fully dowelled (concentric) design to maximise hole fill
- Compared to traditional cylindrical fasteners the **shear load capacity increases by over 500%**
- **Clamping area is increased by over 100%**, ensuring stronger and more reliable joints
- **Reduces risk of damage** to both metal and composite structures

### PRODUCT FEATURES


- **Multi use Temporary Fastener**
- **Through bolt design**
- **Grip range:** 1inch steps, up to 3inches
- **Clamping load:** 50 lbf (222N) to 450 lbf (2000N)
- **Hole sizes** 2.2mm (3/32 inch) to 9.52mm (12/32 inch) standard range
- **Increased doweling**, fills hole completely
- **Increased clamping area** (2.5 x competitors)
- **Manual doughnut or nut-runner installation**
- Now in **metric and inch sizes**
- Rated to **500 cycles**
- **Specials on request**




THIS INFORMATION AND DESIGN IS THE INTELLECTUAL PROPERTY OF KLEKO360

ALL INFORMATION DISCLOSED IS CONFIDENTIAL


LEG IN CLOSED POSTION



SECTION AA-AA SMALL SURFACE AREA WHEN LEG (CLOSED) SCALE 5 : 1

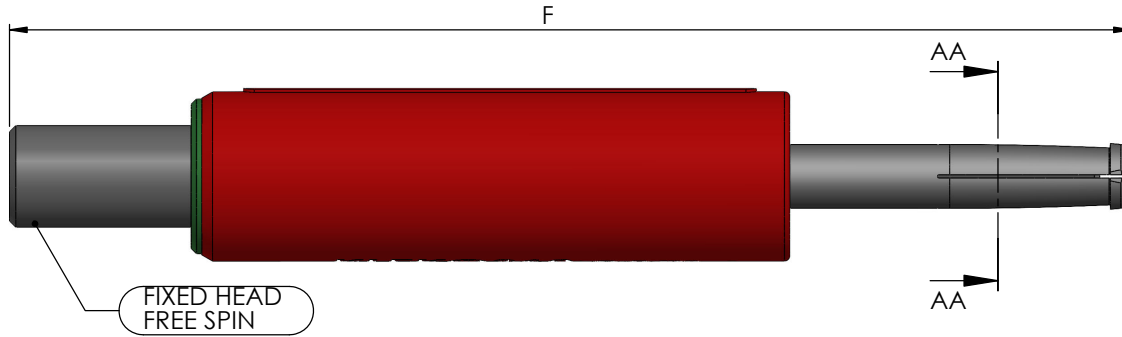


LEG IN OPEN POSTION



SECTION BB-BB LARGE SURFACE AREA FOR CLAMPING (OPEN) SCALE 5 : 1



TOOLING GUIDE



REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
01	READY FOR MANUFACTURE	04/02/2022	JN
02	UPDATE DATE SHEET	07/07/2022	CW
03	0-12mm GRIP RANGE ADDED	22/12/2022	CW
04	0332 FASTENERS ADDED	01/05/2023	JN
05	0932 FASTENERS ADDED	25/09/2023	JN
06	0432 & 0532 MODIFICATION	09/05/2024	KP
07	V19 & V22 CONSOLIDATION	12/09/2024	JN
08	K360-0632-000-026-FXCB-B TO BS	30/06/2025	JN

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY
2. BODY GLASSFIBRE REINFORCED NYLON
3. THREAD HEAT TREATED EN24 TO Y CONDITION FOR 0632 TO 1232 FASTENERS
4. THREAD HEAT TREATED M300 FOR 0432 TO 0532 FASTENERS
5. CLAMPING LEGS HEAT TREATED M300
6. DIP FINISHED IN BOELUBE 70104

7. PATENT NO:


EP2247862  
US8517650  
GB2455635

THIS INFORMATION AND DESIGN IS THE INTELLECTUAL PROPERTY OF KWIKBOLT LTD

ALL INFORMATION DISCLOSED IS CONFIDENTIAL

**KLEKO360**

Fleming Court, Leigh Road,  
Eastleigh, Hampshire,  
SO50 9PD



THIRD ANGLE

COMPUTER PRODUCED DRAWING.  
NO SCALING / MANUAL ALTERATION ALLOWED

DATE: 30 June 2025 16:16:37

REVISION

08

DRAWN

K FUNG

TITLE:

K360-TE-022-08

A3

Tel: +44(0)23 8064 9729 Email: sales@kleko360.com  
© kleko360  
Designs / information in this drawing are covered under patents

CHECKED

K PRAJAPATI

SCALE: 2:1

SHEET 1 OF 3

THIS INFORMATION AND DESIGN IS THE INTELLECTUAL PROPERTY OF KLEKO360

ALL INFORMATION DISCLOSED IS CONFIDENTIAL

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
07	V19 & V22 CONSOLIDATION	12/09/2024	JN
08	K360-0632-000-026-FXCB-B TO BS	30/06/2025	JN

Kwikbolt Part Number	HOLE Diameter			Max Ø HOLE		DIAMETER (A)				DRIVE		BODY				GRIP RANGE (D)				E		F		G	H	CLAMP LOAD		INSTALL TORQUE			
	Nominal	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm			COLOUR	COLOUR	lbf	N	lbf*in	Nm
	K360-0332-000-012-FXCB-KW	17/63	0.093	2.36	0.094488	2.40	0.09252	2.35	0.091339	2.32	3/8	9.53	5/8	15.875	0.000	0.00	0.500	12.70	2.910	74.0	3.740	95.0	BLACK			WHITE	120	540	3.5	0.4	
K360-0332-012-026-FXCB-KS	17/63	0.093	2.36	0.094488	2.40	0.09252	2.35	0.091339	2.32	3/8	9.53	5/8	15.875	0.472	12.00	1.024	26.00	2.910	74.0	4.331	110.0	BLACK	SILVER	120	540	3.5	0.4				


Kwikbolt Part Number	HOLE Diameter			Max Ø HOLE		DIAMETER (A)				DRIVE		BODY				GRIP RANGE (D)				E		F		G	H	CLAMP LOAD		INSTALL TORQUE			
	Nominal	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm			COLOUR	COLOUR	lbf	N	lbf*in	Nm
	K360-0432-000-012-FXCB-YW	1/8	0.125	3.18	0.126	3.20	0.122	3.10	0.113	2.86	3/8	9.53	5/8	15.88	0.000	0.0	0.500	12.7	2.915	74.0	3.937	100.0	YELLOW			WHITE	148	660	4.4	0.5	
K360-0432-012-026-FXCB-YS	1/8	0.125	3.18	0.126	3.20	0.122	3.10	0.113	2.86	3/8	9.53	5/8	15.88	0.500	12.7	1.024	26.0	2.915	74.0	4.724	120.0	YELLOW	SILVER	148	660	4.4	0.5				
K360-0432-012-038-FXCB-YY	1/8	0.125	3.18	0.126	3.20	0.122	3.10	0.113	2.86	3/8	9.53	5/8	15.88	0.472	12.0	1.500	38.1	2.915	74.0	5.118	130.0	YELLOW	YELLOW	148	660	4.4	0.5				
K360-0432-026-051-FXCB-YR	1/8	0.125	3.18	0.126	3.20	0.122	3.10	0.113	2.86	3/8	9.53	5/8	15.88	1.024	26.0	2.008	51.0	2.915	74.0	5.315	135.0	YELLOW	RED	148	660	4.4	0.5				
K360-0432-038-064-FXCB-YB	1/8	0.125	3.18	0.126	3.20	0.122	3.10	0.113	2.86	3/8	9.53	5/8	15.88	1.496	38.0	2.520	64.0	2.915	74.0	5.906	150.0	YELLOW	BLUE	148	660	4.4	0.5				
K360-0432-051-076-FXCB-YG	1/8	0.125	3.18	0.126	3.20	0.122	3.10	0.113	2.86	3/8	9.53	5/8	15.88	2.008	51.0	2.992	76.0	2.915	74.0	6.299	160.0	YELLOW	GREEN	148	660	4.4	0.5				

Kwikbolt Part Number	HOLE Diameter			Max Ø HOLE		DIAMETER (A)				DRIVE		BODY				GRIP RANGE (D)				E		F		G	H	CLAMP LOAD		INSTALL TORQUE			
	Nominal	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm			COLOUR	COLOUR	lbf	N	lbf*in	Nm
	K360-0532-000-012-FXCB-NW	5/32	0.156	3.97	0.157	4.00	0.153	3.89	0.144	3.65	3/8	9.53	5/8	15.88	0.000	0.0	0.500	12.7	2.915	74.0	3.937	100.0	PINK			WHITE	148	660	4.4	0.5	
K360-0532-012-026-FXCB-NS	5/32	0.156	3.97	0.157	4.00	0.153	3.89	0.144	3.65	3/8	9.53	5/8	15.88	0.500	12.7	1.024	26.0	2.915	74.0	4.724	120.0	PINK	SILVER	148	660	4.4	0.5				
K360-0532-012-038-FXCB-NY	5/32	0.156	3.97	0.157	4.00	0.153	3.89	0.144	3.65	3/8	9.53	5/8	15.88	0.472	12.0	1.500	38.1	2.915	74.0	5.118	130.0	PINK	YELLOW	148	660	4.4	0.5				
K360-0532-026-051-FXCB-NR	5/32	0.156	3.97	0.157	4.00	0.153	3.89	0.144	3.65	3/8	9.53	5/8	15.88	1.024	26.0	2.008	51.0	2.915	74.0	5.315	135.0	PINK	RED	148	660	4.4	0.5				
K360-0532-038-064-FXCB-NB	5/32	0.156	3.97	0.157	4.00	0.153	3.89	0.144	3.65	3/8	9.53	5/8	15.88	1.496	38.0	2.520	64.0	2.915	74.0	5.906	150.0	PINK	BLUE	148	660	4.4	0.5				
K360-0532-051-076-FXCB-NG	5/32	0.156	3.97	0.157	4.00	0.153	3.89	0.144	3.65	3/8	9.53	5/8	15.88	2.008	51.0	2.992	76.0	2.915	74.0	6.299	160.0	PINK	GREEN	148	660	4.4	0.5				

Kwikbolt Part Number	HOLE Diameter			Max Ø HOLE		DIAMETER (A)				DRIVE		BODY				GRIP RANGE (D)				E		F		G	H	CLAMP LOAD		INSTALL TORQUE			
	Nominal	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm			COLOUR	COLOUR	lbf	N	lbf*in	Nm
	K360-0632-000-012-FXCB-BW	3/16	0.188	4.76	0.189	4.80	0.185	4.69	0.175	4.45	3/8	9.53	5/8	15.88	0.000	0.0	0.500	12.7	2.915	74.0	3.937	100.0	BLUE			WHITE	303	1350	13.3	1.5	
K360-0632-000-026-FXCB-BS	3/16	0.188	4.76	0.189	4.80	0.185	4.69	0.175	4.45	3/8	9.53	5/8	15.88	0.000	0.0	1.024	26.0	2.915	74.0	4.331	110.0	BLUE	SILVER	303	1350	13.3	1.5				
K360-0632-012-038-FXCB-BY	3/16	0.188	4.76	0.189	4.80	0.185	4.69	0.175	4.45	3/8	9.53	5/8	15.88	0.472	12.0	1.496	38.0	2.915	74.0	4.724	120.0	BLUE	YELLOW	303	1350	13.3	1.5				
K360-0632-026-051-FXCB-BR	3/16	0.188	4.76	0.189	4.80	0.185	4.69	0.175	4.45	3/8	9.53	5/8	15.88	1.024	26.0	2.008	51.0	2.915	74.0	5.315	135.0	BLUE	RED	303	1350	13.3	1.5				
K360-0632-038-064-FXCB-BB	3/16	0.188	4.76	0.189	4.80	0.185	4.69	0.175	4.45	3/8	9.53	5/8	15.88	1.496	38.0	2.520	64.0	2.915	74.0	5.906	150.0	BLUE	BLUE	303	1350	13.3	1.5				
K360-0632-051-076-FXCB-BG	3/16	0.188	4.76	0.189	4.80	0.185	4.69	0.175	4.45	3/8	9.53	5/8	15.88	2.008	51.0	2.992	76.0	2.915	74.0	6.299	160.0	BLUE	GREEN	303	1350	13.3	1.5				

Kwikbolt Part Number	HOLE Diameter			Max Ø HOLE		DIAMETER (A)				DRIVE		BODY				GRIP RANGE (D)				E		F		G	H	CLAMP LOAD		INSTALL TORQUE			
	Nominal	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm			COLOUR	COLOUR	lbf	N	lbf*in	Nm
	K360-0732-000-012-FXCB-EW	7/32	0.219	5.56	0.220	5.60	0.216	5.48	0.204	5.19	3/8	9.53	5/8	15.88	0.000	0.0	0.500	12.7	2.915	74.0	3.937	100.0	GREY			WHITE	303	1350	13.3	1.5	
K360-0732-000-026-FXCB-E	7/32	0.219	5.56	0.220	5.60	0.216	5.48	0.204	5.19	3/8	9.53	5/8	15.88	0.000	0.0	1.024	26.0	2.915	74.0	4.331	110.0	GREY	N/A	303	1350	13.3	1.5				
K360-0732-012-038-FXCB-EY	7/32	0.219	5.56	0.220	5.60	0.216	5.48	0.204	5.19	3/8	9.53	5/8	15.88	0.472	12.0	1.496	38.0	2.915	74.0	4.724	120.0	GREY	YELLOW	303	1350	13.3	1.5				
K360-0732-026-051-FXCB-ER	7/32	0.219	5.56	0.220	5.60	0.216	5.48	0.204	5.19	3/8	9.53	5/8	15.88	1.024	26.0	2.008	51.0	2.915	74.0	5.315	135.0	GREY	RED	303	1350	13.3	1.5				
K360-0732-038-064-FXCB-EB	7/32	0.219	5.56	0.220	5.60	0.216	5.48	0.204	5.19	3/8	9.53	5/8	15.88	1.496	38.0	2.520	64.0	2.915	74.0	5.906	150.0	GREY	BLUE	303	1350	13.3	1.5				
K360-0732-051-076-FXCB-EG	7/32	0.219	5.56	0.220	5.60	0.216	5.48	0.204	5.19	3/8	9.53	5/8	15.88	2.008	51.0	2.992	76.0	2.915	74.0	6.299	160.0	GREY	GREEN	303	1350	13.3	1.5				

**KLEKO360**  
 Fleming Court, Leigh Road,  
 Eastleigh Hampshire,  
 SO50 9PD  
 Tel: +44(0)23 8064 9729 Email: sales@kleko360.com  
 Designs / information in this drawing are covered under patents



COMPUTER PRODUCED DRAWING.  
 NO SCALING / MANUAL ALTERATION ALLOWED

REVISION 08  
 DRAWN K FUNG  
 CHECKED K PRAJAPATI

TITLE: K360-TE-022-08

A3

THIS INFORMATION AND DESIGN IS THE INTELLECTUAL PROPERTY OF KLEKO360

ALL INFORMATION DISCLOSED IS CONFIDENTIAL

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
07	V19 & V22 CONSOLIDATION	12/09/2024	JN
08	K360-0632-000-026-FXCB-B TO BS	30/06/2025	JN


Kwikbolt Part Number	HOLE Diameter			Max Ø HOLE		DIAMETER (A)				DRIVE		BODY				GRIP RANGE (D)				E		F		G	H	CLAMP LOAD		INSTALL TORQUE	
	Nominal	Inch	mm	Inch	mm	Max Diameter		Min Diameter		Ø B		Ø C		Min		Max		HEAD HEIGHT		TOTAL LENGTH		COLOUR	COLOUR	lbf	N	lbf*in	Nm		
						Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm						
K360-0832-000-012-FXCB-GW	1/4	0.250	6.35	0.268	6.80	0.247	6.27	0.236	5.98	3/8	9.53	5/8	15.88	0.000	0.0	0.500	12.7	2.915	74.0	3.937	100.0	GREEN	WHITE	303	1350	13.3	1.5		
K360-0832-000-026-FXCB-G	1/4	0.250	6.35	0.268	6.80	0.247	6.27	0.236	5.98	3/8	9.53	5/8	15.88	0.000	0.0	1.024	26.0	2.915	74.0	4.331	110.0	GREEN	N/A	303	1350	13.3	1.5		
K360-0832-012-038-FXCB-GY	1/4	0.250	6.35	0.268	6.80	0.247	6.27	0.236	5.98	3/8	9.53	5/8	15.88	0.472	12.0	1.496	38.0	2.915	74.0	4.724	120.0	GREEN	YELLOW	303	1350	13.3	1.5		
K360-0832-026-051-FXCB-GR	1/4	0.250	6.35	0.268	6.80	0.247	6.27	0.236	5.98	3/8	9.53	5/8	15.88	1.024	26.0	2.008	51.0	2.915	74.0	5.315	135.0	GREEN	RED	303	1350	13.3	1.5		
K360-0832-038-064-FXCB-GB	1/4	0.250	6.35	0.268	6.80	0.247	6.27	0.236	5.98	3/8	9.53	5/8	15.88	1.496	38.0	2.520	64.0	2.915	74.0	5.906	150.0	GREEN	BLUE	303	1350	13.3	1.5		
K360-0832-051-076-FXCB-GG	1/4	0.250	6.35	0.268	6.80	0.247	6.27	0.236	5.98	3/8	9.53	5/8	15.88	2.008	51.0	2.992	76.0	2.915	74.0	6.299	160.0	GREEN	GREEN	303	1350	13.3	1.5		

Kwikbolt Part Number	HOLE Diameter			Max Ø HOLE		DIAMETER (A)				DRIVE		BODY				GRIP RANGE (D)				E		F		G	H	CLAMP LOAD		INSTALL TORQUE	
	Nominal	Inch	mm	Inch	mm	Max Diameter		Min Diameter		Ø B		Ø C		Min		Max		HEAD HEIGHT		TOTAL LENGTH		COLOUR	COLOUR	lbf	N	lbf*in	Nm		
						Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm						
K360-0932-000-012-FXCB-PW	2/7	0.281	7.14	0.299	7.59	0.278	7.06	0.267	6.78	3/8	9.53	5/8	15.88	0.000	0.0	0.500	12.7	2.915	74.0	3.937	100.0	PURPLE	WHITE	453	2015	17.7	2.0		
K360-0932-000-026-FXCB-P	2/7	0.281	7.14	0.299	7.59	0.278	7.06	0.267	6.78	3/8	9.53	5/8	15.88	0.000	0.0	1.024	26.0	2.915	74.0	4.331	110.0	PURPLE	N/A	453	2015	17.7	2.0		
K360-0932-012-038-FXCB-PY	2/7	0.281	7.14	0.299	7.59	0.278	7.06	0.267	6.78	3/8	9.53	5/8	15.88	0.472	12.0	1.496	38.0	2.915	74.0	4.724	120.0	PURPLE	YELLOW	453	2015	17.7	2.0		
K360-0932-026-051-FXCB-PR	2/7	0.281	7.14	0.299	7.59	0.278	7.06	0.267	6.78	3/8	9.53	5/8	15.88	1.024	26.0	2.008	51.0	2.915	74.0	5.315	135.0	PURPLE	RED	453	2015	17.7	2.0		
K360-0932-038-064-FXCB-PB	2/7	0.281	7.14	0.299	7.59	0.278	7.06	0.267	6.78	3/8	9.53	5/8	15.88	1.496	38.0	2.520	64.0	2.915	74.0	5.906	150.0	PURPLE	BLUE	453	2015	17.7	2.0		
K360-0932-051-076-FXCB-PG	2/7	0.281	7.14	0.299	7.59	0.278	7.06	0.267	6.78	3/8	9.53	5/8	15.88	2.008	51.0	2.992	76.0	2.915	74.0	6.299	160.0	PURPLE	GREEN	453	2015	17.7	2.0		

Kwikbolt Part Number	HOLE Diameter			Max Ø HOLE		DIAMETER (A)				DRIVE		BODY				GRIP RANGE (D)				E		F		G	H	CLAMP LOAD		INSTALL TORQUE	
	Nominal	Inch	mm	Inch	mm	Max Diameter		Min Diameter		Ø B		Ø C		Min		Max		HEAD HEIGHT		TOTAL LENGTH		COLOUR	COLOUR	lbf	N	lbf*in	Nm		
						Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm						
K360-1032-000-012-FXCB-WW	5/16	0.313	7.94	0.331	8.40	0.310	7.86	0.298	7.57	3/8	9.53	5/8	15.88	0.000	0.0	0.500	12.7	2.915	74.0	3.937	100.0	WHITE	WHITE	453	2015	17.7	2.0		
K360-1032-000-026-FXCB-W	5/16	0.313	7.94	0.331	8.40	0.310	7.86	0.298	7.57	3/8	9.53	5/8	15.88	0.000	0.0	1.024	26.0	2.915	74.0	4.331	110.0	WHITE	N/A	453	2015	17.7	2.0		
K360-1032-012-038-FXCB-WY	5/16	0.313	7.94	0.331	8.40	0.310	7.86	0.298	7.57	3/8	9.53	5/8	15.88	0.472	12.0	1.496	38.0	2.915	74.0	4.724	120.0	WHITE	YELLOW	453	2015	17.7	2.0		
K360-1032-026-051-FXCB-WR	5/16	0.313	7.94	0.331	8.40	0.310	7.86	0.298	7.57	3/8	9.53	5/8	15.88	1.024	26.0	2.008	51.0	2.915	74.0	5.315	135.0	WHITE	RED	453	2015	17.7	2.0		
K360-1032-038-064-FXCB-WB	5/16	0.313	7.94	0.331	8.40	0.310	7.86	0.298	7.57	3/8	9.53	5/8	15.88	1.496	38.0	2.520	64.0	2.915	74.0	5.906	150.0	WHITE	BLUE	453	2015	17.7	2.0		
K360-1032-051-076-FXCB-WG	5/16	0.313	7.94	0.331	8.40	0.310	7.86	0.298	7.57	3/8	9.53	5/8	15.88	2.008	51.0	2.992	76.0	2.915	74.0	6.299	160.0	WHITE	GREEN	453	2015	17.7	2.0		

Kwikbolt Part Number	HOLE Diameter			Max Ø HOLE		DIAMETER (A)				DRIVE		BODY				GRIP RANGE (D)				E		F		G	H	CLAMP LOAD		INSTALL TORQUE	
	Nominal	Inch	mm	Inch	mm	Max Diameter		Min Diameter		Ø B		Ø C		Min		Max		HEAD HEIGHT		TOTAL LENGTH		COLOUR	COLOUR	lbf	N	lbf*in	Nm		
						Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm						
K360-1232-000-012-FXCB-OW	3/8	0.375	9.53	0.394	10.00	0.372	9.45	0.361	9.16	3/8	9.53	5/8	15.88	0.000	0.0	0.500	12.7	2.915	74.0	3.937	100.0	ORANGE	WHITE	453	2015	17.7	2.0		
K360-1232-000-026-FXCB-O	3/8	0.375	9.53	0.394	10.00	0.372	9.45	0.361	9.16	3/8	9.53	5/8	15.88	0.000	0.0	1.024	26.0	2.915	74.0	4.331	110.0	ORANGE	N/A	453	2015	17.7	2.0		
K360-1232-012-038-FXCB-OY	3/8	0.375	9.53	0.394	10.00	0.372	9.45	0.361	9.16	3/8	9.53	5/8	15.88	0.472	12.0	1.496	38.0	2.915	74.0	4.724	120.0	ORANGE	YELLOW	453	2015	17.7	2.0		
K360-1232-026-051-FXCB-OR	3/8	0.375	9.53	0.394	10.00	0.372	9.45	0.361	9.16	3/8	9.53	5/8	15.88	1.024	26.0	2.008	51.0	2.915	74.0	5.315	135.0	ORANGE	RED	453	2015	17.7	2.0		
K360-1232-038-064-FXCB-OB	3/8	0.375	9.53	0.394	10.00	0.372	9.45	0.361	9.16	3/8	9.53	5/8	15.88	1.496	38.0	2.520	64.0	2.915	74.0	5.906	150.0	ORANGE	BLUE	453	2015	17.7	2.0		
K360-1232-051-076-FXCB-OG	3/8	0.375	9.53	0.394	10.00	0.372	9.45	0.361	9.16	3/8	9.53	5/8	15.88	2.008	51.0	2.992	76.0	2.915	74.0	6.299	160.0	ORANGE	GREEN	453	2015	17.7	2.0		

**KLEKO360** Fleming Court, Leigh Road, Eastleigh Hampshire, SO50 9PD  
 Tel: +44(0)23 8064 9729 Email: sales@kleko360.com © kleko360  
 Designs / information in this drawing are covered under patents



COMPUTER PRODUCED DRAWING. NO SCALING / MANUAL ALTERATION ALLOWED

DATE: 30 June 2025 16:16:37


REVISION	08	DRAWN	K FUNG
CHECKED	K PRAJAPATI		

TITLE: K360-TE-022-08



THIS INFORMATION AND DESIGN IS THE INTELLECTUAL PROPERTY OF KLEKO360

ALL INFORMATION DISCLOSED IS CONFIDENTIAL


LEG IN CLOSED POSTION



SECTION AA-AA SMALL SURFACE AREA WHEN LEG (CLOSED) SCALE 5 : 1

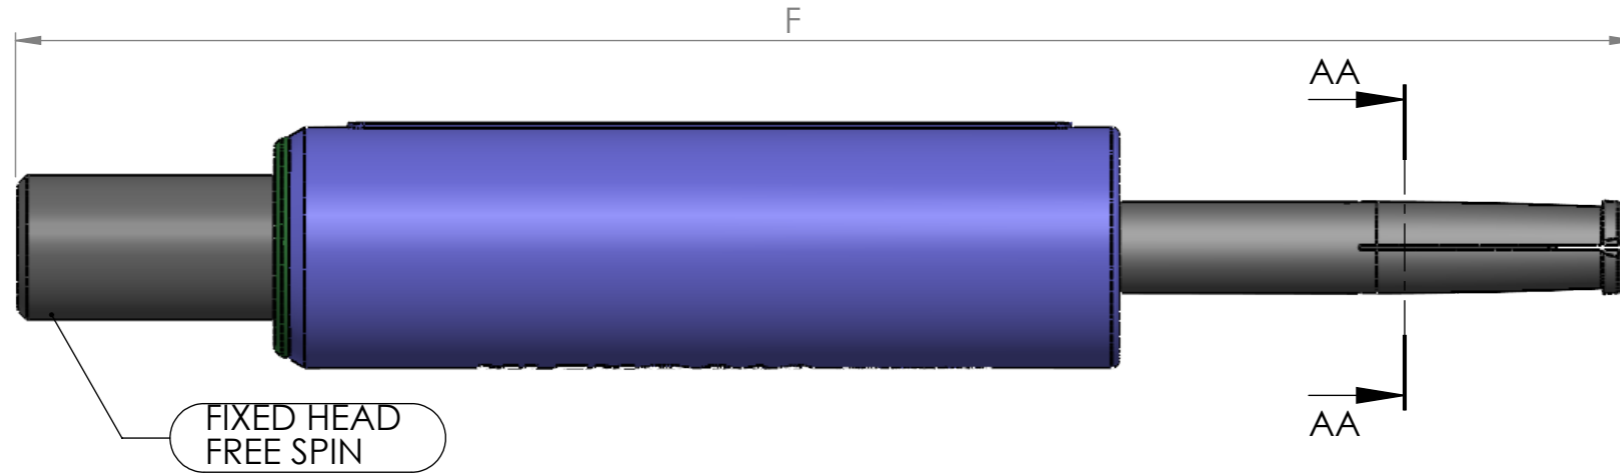

SECTION BB-BB LARGE SURFACE AREA FOR CLAMPING (OPEN) SCALE 5 : 1

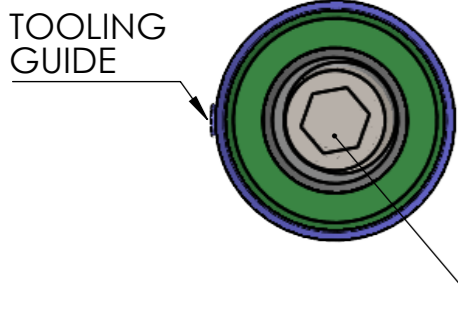

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
01	INITIAL DESIGN	20/09/2024	JN
02	GREY CAP CHANGE FOR 0632	23/09/2024	JN

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY
2. BODY GLASSFIBRE REINFORCED NYLON
3. THREAD HEAT TREATED EN24 TO Y CONDITION FOR 0045 TO 0080 FASTENERS
4. THREAD HEAT TREATED M300 FOR 0025 TO 0040 FASTENERS
5. CLAMPING LEGS HEAT TREATED M300
6. DIP FINISHED IN BOELUBE 70104
7. PATENT NO:

EP2247862  
US8517650  
GB2455635


THIS INFORMATION AND DESIGN IS THE INTELLECTUAL PROPERTY OF KWIKBOLT LTD  
ALL INFORMATION DISCLOSED IS CONFIDENTIAL

**KLEKO360**

Fleming Court, Leigh Road,  
Eastleigh, Hampshire,  
SO50 9PD

Tel: +44(0)23 8064 9729 Email: sales@kleko360.com  
Designs / information in this drawing are covered under patents

© kleko360



COMPUTER PRODUCED DRAWING.  
NO SCALING / MANUAL ALTERATION ALLOWED

DATE: 24 September 2024 08:26:41

REVISION	02	DRAWN	K FUNG
		CHECKED	K PRAJAPATI

TITLE:  
K360-TE-M-002-02

A3

SCALE: 2:1

SHEET 1 OF 4

THIS INFORMATION AND DESIGN IS THE INTELLECTUAL PROPERTY OF KLEKO360

ALL INFORMATION DISCLOSED IS CONFIDENTIAL

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
02	GREY CAP CHANGE FOR 0632	23/09/2024	JN

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)		DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE			
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	lbf	N	lbf*in	Nm		
													Inch	mm	Inch	mm	Inch	mm							Inch	mm
K360-0025-000-012-BXCB-KW	0.098	2.50	0.1063	2.70	0.0965	2.45	0.0906	2.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	BLACK	WHITE	120	540	3.5	0.4
K360-0025-012-026-BXCB-KS	0.098	2.50	0.1063	2.70	0.0965	2.45	0.0906	2.30	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.024	26.0	4.331	115	BLACK	SILVER	120	540	3.5	0.4

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)		DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE			
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	lbf	N	lbf*in	Nm		
													Inch	mm	Inch	mm	Inch	mm							Inch	mm
K360-0030-000-012-BXCB-YW	0.118	3.00	0.1260	3.20	0.1161	2.95	0.1102	2.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	YELLOW	WHITE	148	660	4.4	0.5
K360-0030-012-026-BXCB-YS	0.118	3.00	0.1260	3.20	0.1161	2.95	0.1102	2.80	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.024	26.0	4.528	115	YELLOW	SILVER	148	660	4.4	0.5
K360-0030-012-038-BXCB-YY	0.118	3.00	0.1260	3.20	0.1161	2.95	0.1102	2.80	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	YELLOW	YELLOW	148	660	4.4	0.5
K360-0030-026-051-BXCB-YR	0.118	3.00	0.1260	3.20	0.1161	2.95	0.1102	2.80	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	YELLOW	RED	148	660	4.4	0.5
K360-0030-038-064-BXCB-YB	0.118	3.00	0.1260	3.20	0.1161	2.95	0.1102	2.80	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	YELLOW	BLUE	148	660	4.4	0.5
K360-0030-051-076-BXCB-YG	0.118	3.00	0.1260	3.20	0.1161	2.95	0.1102	2.80	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	YELLOW	GREEN	148	660	4.4	0.5

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)		DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE			
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	lbf	N	lbf*in	Nm		
													Inch	mm	Inch	mm	Inch	mm							Inch	mm
K360-0035-000-012-BXCB-QW	0.138	3.50	0.1457	3.70	0.1358	3.45	0.1299	3.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	LIGHT BLUE	WHITE	148	660	4.4	0.5
K360-0035-012-026-BXCB-QS	0.138	3.50	0.1457	3.70	0.1358	3.45	0.1299	3.30	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.024	26.0	4.528	115	LIGHT BLUE	SILVER	148	660	4.4	0.5
K360-0035-012-038-BXCB-QY	0.138	3.50	0.1457	3.70	0.1358	3.45	0.1299	3.30	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	LIGHT BLUE	YELLOW	148	660	4.4	0.5
K360-0035-026-051-BXCB-QR	0.138	3.50	0.1457	3.70	0.1358	3.45	0.1299	3.30	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	LIGHT BLUE	RED	148	660	4.4	0.5
K360-0035-038-064-BXCB-QB	0.138	3.50	0.1457	3.70	0.1358	3.45	0.1299	3.30	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	LIGHT BLUE	BLUE	148	660	4.4	0.5
K360-0035-051-076-BXCB-QG	0.138	3.50	0.1457	3.70	0.1358	3.45	0.1299	3.30	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	LIGHT BLUE	GREEN	148	660	4.4	0.5

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)		DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE			
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	lbf	N	lbf*in	Nm		
													Inch	mm	Inch	mm	Inch	mm							Inch	mm
K360-0040-000-012-BXCB-NW	0.157	4.00	0.1654	4.20	0.1555	3.95	0.1496	3.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	PINK	WHITE	148	660	4.4	0.5
K360-0040-012-026-BXCB-NS	0.157	4.00	0.1654	4.20	0.1555	3.95	0.1496	3.80	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.024	26.0	4.528	115	PINK	SILVER	148	660	4.4	0.5
K360-0040-012-038-BXCB-NY	0.157	4.00	0.1654	4.20	0.1555	3.95	0.1496	3.80	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	PINK	YELLOW	148	660	4.4	0.5
K360-0040-026-051-BXCB-NR	0.157	4.00	0.1654	4.20	0.1555	3.95	0.1496	3.80	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	PINK	RED	148	660	4.4	0.5
K360-0040-038-064-BXCB-NB	0.157	4.00	0.1654	4.20	0.1555	3.95	0.1496	3.80	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	PINK	BLUE	148	660	4.4	0.5
K360-0040-051-076-BXCB-NG	0.157	4.00	0.1654	4.20	0.1555	3.95	0.1496	3.80	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	PINK	GREEN	148	660	4.4	0.5

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)		DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE			
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	lbf	N	lbf*in	Nm		
													Inch	mm	Inch	mm	Inch	mm							Inch	mm
K360-0045-000-012-BXCB-BW	0.177	4.50	0.1850	4.70	0.1752	4.45	0.1693	4.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	BLUE	WHITE	303	1350	13.3	1.5
K360-0045-000-026-BXCB-BS	0.177	4.50	0.1850	4.70	0.1752	4.45	0.1693	4.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	BLUE	SILVER	303	1350	13.3	1.5
K360-0045-012-038-BXCB-BY	0.177	4.50	0.1850	4.70	0.1752	4.45	0.1693	4.30	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	BLUE	YELLOW	303	1350	13.3	1.5
K360-0045-026-051-BXCB-BR	0.177	4.50	0.1850	4.70	0.1752	4.45	0.1693	4.30	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	BLUE	RED	303	1350	13.3	1.5
K360-0045-038-064-BXCB-BB	0.177	4.50	0.1850	4.70	0.1752	4.45	0.1693	4.30	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	BLUE	BLUE	303	1350	13.3	1.5
K360-0045-051-076-BXCB-BG	0.177	4.50	0.1850	4.70	0.1752	4.45	0.1693	4.30	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	BLUE	GREEN	303	1350	13.3	1.5



THIS INFORMATION AND DESIGN IS THE INTELLECTUAL PROPERTY OF KLEKO360

ALL INFORMATION DISCLOSED IS CONFIDENTIAL

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
02	GREY CAP CHANGE FOR 0632	23/09/2024	JN


Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)				DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE	
	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	COLOUR	COLOUR	lbf	N	lbf*in	Nm
K360-0050-000-012-BXCB-RW	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	RED	WHITE	303	1350	13.3	1.5
K360-0050-000-026-BXCB-RS	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	RED	SILVER	303	1350	13.3	1.5
K360-0050-012-038-BXCB-RY	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	RED	YELLOW	303	1350	13.3	1.5
K360-0050-026-051-BXCB-RR	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	RED	RED	303	1350	13.3	1.5
K360-0050-038-064-BXCB-RB	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	RED	BLUE	303	1350	13.3	1.5
K360-0050-051-076-BXCB-RG	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	RED	GREEN	303	1350	13.3	1.5

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)				DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE	
	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	COLOUR	COLOUR	lbf	N	lbf*in	Nm
K360-0055-000-012-BXCB-UW	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	LIGHT GREEN	WHITE	303	1350	13.3	1.5
K360-0055-000-026-BXCB-US	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	LIGHT GREEN	SILVER	303	1350	13.3	1.5
K360-0055-012-038-BXCB-UY	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	LIGHT GREEN	YELLOW	303	1350	13.3	1.5
K360-0055-026-051-BXCB-UR	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	LIGHT GREEN	RED	303	1350	13.3	1.5
K360-0055-038-064-BXCB-UB	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	LIGHT GREEN	BLUE	303	1350	13.3	1.5
K360-0055-051-076-BXCB-UG	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	LIGHT GREEN	GREEN	303	1350	13.3	1.5

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)				DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE	
	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	COLOUR	COLOUR	lbf	N	lbf*in	Nm
K360-0060-000-012-BXCB-EW	0.236	6.00	0.2441	6.20	0.2343	5.95	0.2283	5.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	GREY	WHITE	303	1350	13.3	1.5
K360-0060-000-026-BXCB-ES	0.236	6.00	0.2441	6.20	0.2343	5.95	0.2283	5.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	GREY	SILVER	303	1350	13.3	1.5
K360-0060-012-038-BXCB-EY	0.236	6.00	0.2441	6.20	0.2343	5.95	0.2283	5.80	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	GREY	YELLOW	303	1350	13.3	1.5
K360-0060-026-051-BXCB-ER	0.236	6.00	0.2441	6.20	0.2343	5.95	0.2283	5.80	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	GREY	RED	303	1350	13.3	1.5
K360-0060-038-064-BXCB-EB	0.236	6.00	0.2441	6.20	0.2343	5.95	0.2283	5.80	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	GREY	BLUE	303	1350	13.3	1.5
K360-0060-051-076-BXCB-EG	0.236	6.00	0.2441	6.20	0.2343	5.95	0.2283	5.80	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	GREY	GREEN	303	1350	13.3	1.5

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)				DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE	
	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	COLOUR	COLOUR	lbf	N	lbf*in	Nm
K360-0065-000-012-BXCB-GW	0.256	6.50	0.2638	6.70	0.2539	6.45	0.2480	6.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	GREEN	WHITE	303	1350	13.3	1.5
K360-0065-000-026-BXCB-GS	0.256	6.50	0.2638	6.70	0.2539	6.45	0.2480	6.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	GREEN	SILVER	303	1350	13.3	1.5
K360-0065-012-038-BXCB-GY	0.256	6.50	0.2638	6.70	0.2539	6.45	0.2480	6.30	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	GREEN	YELLOW	303	1350	13.3	1.5
K360-0065-026-051-BXCB-GR	0.256	6.50	0.2638	6.70	0.2539	6.45	0.2480	6.30	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	GREEN	RED	303	1350	13.3	1.5
K360-0065-038-064-BXCB-GB	0.256	6.50	0.2638	6.70	0.2539	6.45	0.2480	6.30	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	GREEN	BLUE	303	1350	13.3	1.5
K360-0065-051-076-BXCB-GG	0.256	6.50	0.2638	6.70	0.2539	6.45	0.2480	6.30	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	GREEN	GREEN	303	1350	13.3	1.5

**KLEKO360** Fleming Court, Leigh Road, Eastleigh, Hampshire, SO50 9PD  
 Tel: +44(0)23 8064 9729 Email: sales@kleko360.com © kleko360  
 Designs / information in this drawing are covered under patents



COMPUTER PRODUCED DRAWING. NO SCALING / MANUAL ALTERATION ALLOWED

DATE: 24 September 2024 08:26:41

REVISION	02	DRAWN	K FUNG
CHECKED	K PRAJAPATI		

TITLE: K360-TE-M-002-02

THIS INFORMATION AND DESIGN IS THE INTELLECTUAL PROPERTY OF KLEKO360

ALL INFORMATION DISCLOSED IS CONFIDENTIAL

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
02	GREY CAP CHANGE FOR 0632	23/09/2024	JN

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)				DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE	
	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	COLOUR	COLOUR	lbf	N	lbf*in	Nm
K360-0070-000-012-BXCB-PW	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	PURPLE	WHITE	453	2015	17.7	2.0
K360-0070-000-026-BXCB-PS	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	PURPLE	SILVER	453	2015	17.7	2.0
K360-0070-012-038-BXCB-PY	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	PURPLE	YELLOW	453	2015	17.7	2.0
K360-0070-026-051-BXCB-PR	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	PURPLE	RED	453	2015	17.7	2.0
K360-0070-038-064-BXCB-PB	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	PURPLE	BLUE	453	2015	17.7	2.0
K360-0070-051-076-BXCB-PG	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	PURPLE	GREEN	453	2015	17.7	2.0

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)				DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE	
	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	COLOUR	COLOUR	lbf	N	lbf*in	Nm
K360-0075-000-012-BXCB-OW	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	ORANGE	WHITE	453	2015	17.7	2.0
K360-0075-000-026-BXCB-OS	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	ORANGE	SILVER	453	2015	17.7	2.0
K360-0075-012-038-BXCB-OY	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	ORANGE	YELLOW	453	2015	17.7	2.0
K360-0075-026-051-BXCB-OR	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	ORANGE	RED	453	2015	17.7	2.0
K360-0075-038-064-BXCB-OB	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	ORANGE	BLUE	453	2015	17.7	2.0
K360-0075-051-076-BXCB-OG	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	ORANGE	GREEN	453	2015	17.7	2.0

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		DIAMETER (A)				DRIVE		BODY		D		GRIP RANGE (E)				F		G	H	CLAMP LOAD		INSTALL TORQUE	
	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	COLOUR	COLOUR	lbf	N	lbf*in	Nm
K360-0080-000-012-BXCB-WW	0.315	8.00	0.3228	8.20	0.3130	7.95	0.3071	7.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	WHITE	WHITE	453	2015	17.7	2.0
K360-0080-000-026-BXCB-WS	0.315	8.00	0.3228	8.20	0.3130	7.95	0.3071	7.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	WHITE	SILVER	453	2015	17.7	2.0
K360-0080-012-038-BXCB-WY	0.315	8.00	0.3228	8.20	0.3130	7.95	0.3071	7.80	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	WHITE	YELLOW	453	2015	17.7	2.0
K360-0080-026-051-BXCB-WR	0.315	8.00	0.3228	8.20	0.3130	7.95	0.3071	7.80	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	WHITE	RED	453	2015	17.7	2.0
K360-0080-038-064-BXCB-WB	0.315	8.00	0.3228	8.20	0.3130	7.95	0.3071	7.80	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	WHITE	BLUE	453	2015	17.7	2.0
K360-0080-051-076-BXCB-WG	0.315	8.00	0.3228	8.20	0.3130	7.95	0.3071	7.80	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	WHITE	GREEN	453	2015	17.7	2.0

